

Cyclades® PM

Intelligent Power Distribution Unit

IEC Models




Integrated Remote Power Management and Distribution

Cyclades® PM intelligent power distribution units (IPDUs) enable remote power control and system management of IT assets. When used in conjunction with Cyclades ACS advanced console servers and DSR® switch appliances, Cyclades PM IPDUs offer quick problem resolution through an integrated management interface. With one or more outlets positively associated with a particular device, users may control power “in line” through a user-defined “hot key” or by using an intuitive Web browser-based GUI. In addition, a special command set facilitates scripting.

Cyclades PM IPDUs – IEC Models

Cyclades PM IEC models are equipped with IEC320-C13 power outlets and either IEC520 modular inlets or fixed power cables. These units are available in 10A, 15A, 16A, 20A, 30A and 32A capacities. Each model includes two RS-232 ports: one for management and the second for daisy-chain expansion. Daisy-chaining allows an operator to control up to 128 power outlets as a single device. Cyclades IEC IPDUs are designed to operate in 100-240 VAC environments.

An LED display shows the real time, true RMS current draw. Each PM unit may be configured to sound an alarm during an overcurrent condition, and if it is connected to a Cyclades ACS console server, the IPDU may also send notifications via e-mail messages, Short Message Service (SMS) pager messages and SNMP traps.

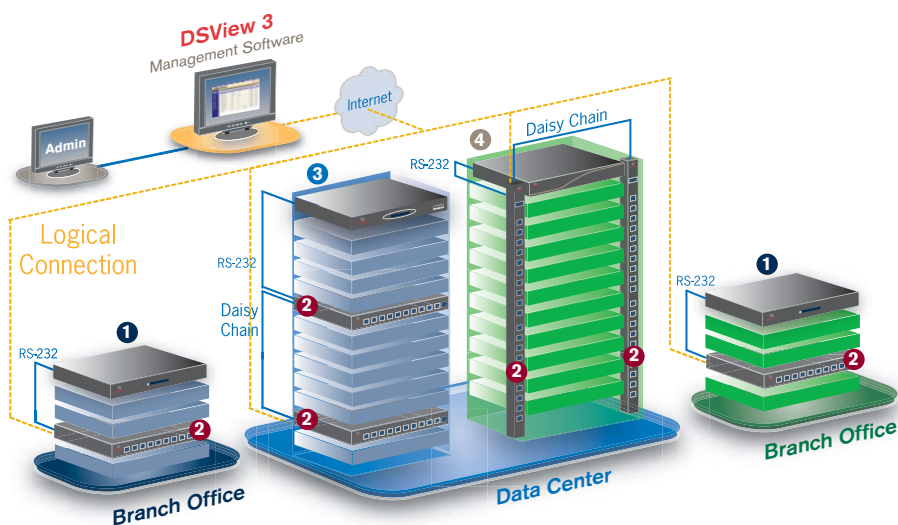

- 1** Cyclades OnSite Branch Office Appliance
- 2** Cyclades PM IPDU
- 3** Cyclades ACS Advanced Console Server
- 4** DSR Switch

Applications

- Power control over remote IT assets from anywhere on earth
- Seamless integration with Cyclades ACS console servers, DSR switches and DSView® 3 management software
- Proactive fault management and isolation
- Fault notifications via e-mail, SMS page and SNMP traps

Benefits

- Restore practically any IT asset without dispatching service personnel
- Virtually eliminate power control errors during crisis situations
- Improve administrative efficiency with integrated control functions
- Proactively identify and manage problems to improve mean time between failure (MTBF)
- Reduce risk, reduce mean time to recovery (MTTR)
- Conserve valuable IP addresses and switch ports

Hardware Specifications – IEC

Interfaces: 2 RJ-45 RS-232 serial ports (9,600 8-N-1)
10 or 20 IEC 320-C15 outlets

Power:

PM10i-10A
100–240 VAC, 10 A, IEC 320-C14 inlet
15 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

PM10i-32A, PM20i-32A
100–240 VAC, 32 A, IEC 309 plug
32 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

PM10i-15A*
100–240 VAC, 15 A, IEC 320-C14 inlet
15 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

PM10i-32Au, PM20i-32Au
100–240 VAC, 32 A, unterminated cable
32 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

PM10i-16A
100–240 VAC, 16 A, IEC 320-C20 inlet
16 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

PM20i-16A
100–240 VAC, 16 A, IEC 320-C20 inlet
16 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

PM10i-20A,* PM20i-20A*
100–240 VAC, 20 A, IEC 320-C20 inlet
20 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

PM10i-L30A,* PM20i-L30A*
100–240 VAC, 30 A, NEMA L6-30P twist-lock plug
30 A max. branch circuit rating
10 A max. per IEC 320-C15 outlet

Operating

Temperature: 50°F to 122°F (10°C to 50°C)

Storage

Temperature: –40°F to 185°F (–40°C to 85°C)

Humidity: 5% to 95% noncondensing

Dimensions:

(W x D x H) **PM10i-10A, -15A, -16A, -20A**
17 x 8 x 1.75 in. (43.18 x 20.32 x 4.45 cm)

PM10i-L30A, -32A, -32Au
17 x 12 x 1.75 in. (43.18 x 30.48 x 4.45 cm)

PM20i-16A, -20A, -L30A, -32A, -32Au
2 x 2.8 x 66 in. (5.08 x 7.11 x 167.64 cm)

Weight: **PM10i** 11.1 lb 5.0 kg
PM20i 14.1 lb 6.4 kg

Certifications: FCC Part 15, A CSA (fully compliant to UL standard)
EN55022, A (CE)[†] EN55024[†]
EN60950[†] C-Tick[†]

*Units are certified to 80% of max. current rating.

[†]International models.

Part Number	Model	Description
ATP3110	PM10i-10A	10 outlets, 10 A max. branch, IEC 320-C14
ATP3115	PM10i-15A	10 outlets, 15 A max. branch, IEC 320-C14
ATP3116	PM10i-16A	10 outlets, 16 A max. branch, IEC 320-C20
ATP3120	PM10i-20A	10 outlets, 20 A max. branch, IEC 320-C20
ATP3231	PM10i-L30A	10 outlets, 30 A max. branch, NEMA L6-30P
ATP3230	PM10i-32A	10 outlets, 32 A max. branch, IEC 309
ATP3232	PM10i-32Au	10 outlets, 32 A max. branch, unterminated
ATP2116	PM20i-16A	20 outlets, 16 A max. branch, IEC 320-C20
ATP2120	PM20i-20A	20 outlets, 20 A max. branch, IEC 320-C20
ATP3130	PM20i-L30A	20 outlets, 30 A max. branch, NEMA L6-30P
ATP2132	PM20i-32A	20 outlets, 32 A max. branch, IEC 309
ATP2131	PM20i-32Au	20 outlets, 32 A max. branch, unterminated
CAB0055	PM10i, 10 A Power Cable	8 ft, IEC320-C15 to AS5112, AUS & NZ
CAB0087	PM10i, 10 A Power Cable	8 ft, IEC320-C15 to CEE 7/7 Schuko, Continental EU
CAB0088	PM10i, 10 A Power Cable	8 ft, IEC320-C15 to BS1563, UK & Ireland
CAB0089	PM10i, 10 A Power Cable	8 ft, IEC320-C15 to NEMA 5-15P, USA
CAB0191	PM10i, 15 A Power Cable	8 ft, IEC320-C15 to NEMA 6-15P, USA
CAB0192	PM10i, PM20i, 16 A Power Cable	8 ft, IEC320-C19 to AS5112, AUS & NZ
CAB0195	PM10i, PM20i, 16 A Power Cable	8 ft, IEC320-C19 to CEE 7/7 Schuko, Continental EU
CAB0194	PM10i, PM20i, 16 A Power Cable	8 ft, IEC320-C19 to BS1563, UK & Ireland
CAB0195	PM10i, PM20i, 20 A US Power Cable	8 ft, IEC320-C19 to NEMA 5-20P, USA
CAB0197	PM10i, PM20i, 20 A US Power Cable	8 ft, IEC320-C19 to NEMA L6-20P, USA
CAB0198	PM10i, PM20i, 20 A US Power Cable	8 ft, IEC320-C19 to NEMA L5-20P, USA

Features

Connectivity

- RS-232 serial port for configuration and management
- Second RS-232 serial port for control-level daisy chaining (up to 128 outlets)
- Full RS-232 signal support allows dial-in access via modem

Administration

- Name assignment per IPDU (up to 8 characters)
- Name assignment per outlet (up to 16 characters)
- Local authentication support (up to 8 users)
- Per-outlet access control lists

Management

- Independent control of power outlets (power on/off, cycle)
- Virtual lock per outlet (on or off states)
- Sequential power up with user-defined inter-outlet delays
- Global, true RMS current monitoring per IPDU
- Two-digit 7-segment LED current display
- On/off status LED per outlet
- User-defined overcurrent threshold with alarm
- Built-in visual and audible alarms
- Built-in ambient temperature sensor

Form Factors

- Industry's highest outlet density (up to 10 outlets per 1U)
- Horizontal (1U) and vertical (0U) models address a wide variety of applications

Integration Features*

- Integrated power management through console and KVM sessions
- CLI, menu and GUI interfaces
- Multioutlet grouping for devices with redundant power supplies
- RADIUS, TACACS+, Kerberos, LDAP, and Active Directory server-based authentication with local fallback
- Token-based strong authentication (RSA SecurID)
- Event logging via syslog
- Fault notification via e-mail, SMS page, SNMP trap
- SNMP integration with enterprise systems

*Features available when product is used in conjunction with Cyclades ACS console servers, DSR switches, Cyclades OnSite branch office appliance or DSView 3 management software (not included).

IEC

Inputs



NEMA L6-30P
on fixed 8 ft power cord



Unterminated
on fixed 8 ft power cord



IEC-309
on fixed 8 ft power cord

Outlets



IEC 320-C13



IEC 320-C14
modular inlet



IEC 320-C20
modular inlet



Corporate Headquarters
4991 Corporate Drive, Huntsville, AL 35805
TEL 866.286.2368 FAX 256.430.4030
www.avocent.com

Avocent, the Avocent logo, The Power of Being There, Cyclades, DSR and DSView are registered trademarks of Avocent Corporation or its affiliates. All other marks are the property of their respective owners.

Copyright © 2006. Avocent Corporation. All rights reserved.

0506-CPMI-DS



DATA CENTER SOLUTIONS

Our customers turn to us for productivity improvements in the data center. TPI's expertise guarantees your IT data center project will be successful: on time, on budget and meet your ROI requirements.

TPI's data center experts provide:

- ✓ *KVM over IP solutions*
- ✓ *Out-of-band console management*
- ✓ *Enhanced security and Sarbanes-Oxley compliance*
- ✓ *Comprehensive environmental assessments*
- ✓ *Power management*
- ✓ *Console and command center solutions*
- ✓ *LAN cabinets and server racks*
- ✓ *Tech-benches and media storage*
- ✓ *Asset tracking*
- ✓ *Backup tape products*
- ✓ *Compliance Vault e-mail archiving*
- ✓ *Comprehensive supply programs*

TPI can share best practices in data center management. Our expertise allows you to shorten your learning curve and increase your IT productivity.

Product specification sheet provided by TPI



www.tpi1.com
888-488-4244

