

Product Profile



- Best-in-class flexibility offers the most versatile set of features and options for fixed mount vehicle and stationary applications
- Smallest full-screen footprint
- Improves forklift safety by increasing driver visibility
- Ideal solution for cross-application deployment
- Versatile ADC Control Center that enables real-time decision-making through integration and management of multiple types of data inputs

CV30 RUGGED FIXED MOUNT COMPUTER

The CV30 rugged fixed mount computer provides flexibility and high-performance capabilities in a compact design that delivers real-time wireless supply chain management right where the data is – at the dock, in the freezer, on the warehouse floor, or in the yard. Incorporating the CV30 into your warehousing or manufacturing operation will enhance efficiency, increase safety and improve operator performance and productivity.

Rugged Design

The CV30 is engineered to withstand the abuse of industrial environments and to satisfy user demands that vehicle mount computers be as durable as forklifts. Its cast magnesium housing, standard heated display and solid state design provides protection exceeding industrial and military standards. The CV30 thrives in harsh environments where dust, moisture or extreme temperatures are constants.

Enhanced Productivity

The CV30 is the ideal ADC control center, easily managing a range of peripherals and applications, from integrated weigh-scale systems to RFID and speech recognition devices. Designed to mount on virtually any surface, the CV30's touch sensitive display simplifies user interaction and enables faster, more accurate performance.

Increased Safety

The CV30's compact full-screen footprint improves safety by providing maximum unobstructed visibility for the forklift


operator without compromising durability. Its wireless connectivity and support for hands-free data capture maximizes productivity while freeing workers from the need to manage cables.

Seamless Compatibility

The CV30 allows users to select from Microsoft® Windows® CE.NET or Windows Mobile 5.0® software for Pocket PC. Both operating systems support the use of terminal emulation today as well as migration to browser-based or custom applications in future. With its support for Intermec's Developer Library, the CV30 also provides easy hardware integration.

Intermec's CV30 includes the latest radio technologies for easy integration with multiple wireless environments. Cisco Compatibility (CCX) enables seamless integration onto existing Cisco infrastructures. Industry-standard Wi-Fi® certified 802.11g radio ensures easy connectivity to existing wireless LANs with the latest in RF security protocols. High-speed connectivity provides support for both wired and wireless peripherals, making the CV30 ideal for demanding warehouse and inventory-control applications.

With the addition of Intermec's SmartSystems™, the CV30 can be used to remotely manage peripherals such as Bluetooth™ scanners and RFID, as well as to remotely and easily manage global deployments.

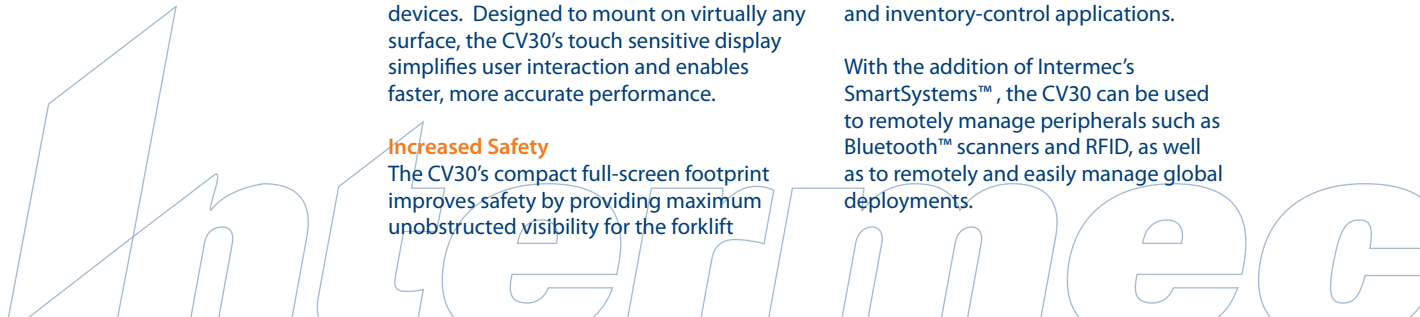

Physical Characteristics

Height: 17.65cm (6.95")
Width: 18.92cm (7.45")
Depth: 5.46cm (2.15")
Weight: 1.47 kg (3.25 lbs) (Enclosure constructed of cast magnesium)

Environmental**Standard Operating Temperature:**

-30° to 50° C (-22° to 122° F)

Storage Temperature:

-20° to 70° C (-4° to 158° F)

Humidity:

5 % to 95 % RH Non-condensing

Shock and Vibration Protection: Withstands standard material handling vehicle environments. Meets or Exceeds MIL STD 810F

Rain and Dust Resistance: Sealed to IP66 (Dust tight and high pressure water)

Power

Choice of two external DC/DC converters

Primary: 6-60 VDC input DC/DC

15-96 VDC input DC/DC

AC/DC Converter

Memory backup:

Rechargeable Lithium-Ion

Hardware

Memory: 128MB SDRAM

128MB Disk on Chip Flash Memory for on-board non-volatile storage of applications and data

Microprocessor: Intel XScale PXA270

Application Processor, 520 MHz

Display: 6.4" (163mm) color VGA 640x480 transmissive TFT LCD unit with replaceable touch panel

- One touch front console user brightness adjustment
- 140 degree viewing angle; 350 NIT
- Touch screen heater standard to minimize frost/fog build-up on viewing area

Software**Operating System Software:**

- Windows Mobile 5.0 Premium Edition
- Microsoft Windows CE.NET 5.0 Professional

Network Connectivity: 10/100 Base-T Ethernet

Application Software:

Terminal Emulation: Factory loaded TE2000

Terminal Emulation applications

Development Environments: Visual Studio 2005, .NET compact Framework (VB, .NET and C#)

Intermec Developer's Library (IDL): Integrates with leading development environments; supports device-specific features, bar code scanning, RFID input, printing, communications

Browser Support: IE6 compatible (Windows CE)/ IE Mobile (Windows Mobile)

Device Management

SmartSystems support: Centralized remote support capability, configures, updates and maintains single devices or entire populations; real-time or batch, wired or wireless.

Wavelink Avalanche™ with Intermec value added utilities.

Integrated Radio**Wireless LAN:****Standards Compliant:**

IEEE 802.11g (2.4 GHz)

IEEE 802.11b (2.4 GHz)

Data rates: Up to 54Mbps for 802.11g ODFM.

Up to 11Mbps for 802.11b DSSS

Radio Power Output: 100mW maximum

Security: WEP, WPA, 802.11x (EAP-TLS, TTLS, LEAP, PEAP), 802.11i

Certifications: Wi-Fi, WPA2, Cisco

Compatible (CCX)

Wireless PAN: Integrated Bluetooth™ class II

compatible module for wireless

Antenna Options

- Integrated diversity antenna options for LAN
- Integrated Bluetooth
- Auto-sense remote patch LAN antenna

Data Collection Scanner Support

- Bluetooth
- Tethered serial bar code scanner
- Tethered RFID scanner
- Integrated wireless bar code scanner
- Bar code slot reader

Interfaces

- (2) Standard Serial Ports – DB9
- (2) USB Host ports v2.0 – DB15 locking connector
- (1) RJ45 Ethernet port
- (1) Locking Power Input
- On / Off Switch
- Audio 2.5mm stereo jack
- Internal Speaker / Beeper

Accessible Expansion Slots

SD Memory Card

Accessories

- Backlit (IP66) keyboards for QWERTY, VT220, 5250, 3270 emulation; space constrained for mounting directly to CV30; large style for mounting remotely ideal for gloved hands
- Desktop Kit
- Vehicle Mounting Bracket options
- Wall Mounting Bracket
- Bar code slot reader – sealed, visible or infrared optic
- USB digital I/O relay module – for monitoring and controlling devices (doors, gates, conveyors)
- Single/Dual locking USB cable
- USB locking cable restraint

Regulatory Approvals/Compliance

Safety: cULUS Listed, OSHA 29 CFR 1910.178

/ ASME B56.11.6 Compliant, GS, CCC, GOST,

NOM, eK, HKS1, SABS, SPRING, prEN ISO 13564

EMC: FCC Part 15B – Class B, ICES-003 Class B,

EN 55022 Class B, EN 55024, EN 301 489-17,

AS/ZNS 3548, GB9254-1998

Radio: FCC Part 15.247, Industry Canada RSS

210, EN 300 328-2, Telecom. Num. 547

Other: Compliant with all applicable EU Directives – EMC, Low Voltage, R&TTE, Vehicle, WEEE, RoHS, Packaging & Waste Packaging

**North America**

Corporate Headquarters
 6001 36th Avenue West
 Everett, Washington 98203
 tel: 425.348.2600
 fax: 425.355.9551

550 2nd Street S.E.
 Cedar Rapids, Iowa 52401
 tel: 319.369.3100
 fax: 319.369.3453

Media Supplies
 9290 Le Saint Drive
 Fairfield, Ohio 45014
 tel: 513.874.5882
 fax: 513.874.8487

Canada

7065 Tranmere Drive
 Mississauga, Ontario
 L5S 1M2 Canada
 tel: 905.673.9333
 fax: 905.673.3974

**Europe/
Middle East & Africa
Headquarters**

Reading International Business Park
 Basingstoke Road
 Reading RG2 6DD
 United Kingdom
 tel: 44.118.923.0800
 fax: 44.118.923.0801

Asia

Asia Regional Office
 #05-02A/03 New Tech Park
 151 Lorong Chuan
 Singapore 556741
 tel: 65.6324.8391
 fax: 65.6324.8393

Beijing Representative Office

29 FL, Unit A1, China Merchant Tower
 118 Jian Guo Road
 Chaoyang District, Beijing 100022
 Tel: 86.10.5165.5922
 Fax: 86.10.6567.6778

Australia

Level 4, 1-3 Atchison Street
 St. Leonards, NSW 2065
 Australia
 tel: 61.2.9330.4400
 fax: 61.2.9437.0204

South America & Mexico

Intermec South America Ltda.
 Rua Samuel Morse 120 9 andar
 Brooklin CEP04576-060
 São Paulo, SP
 Brazil
 tel: 55.11.5502.6770

Intermec Technologies de Mexico

Av Tamaulipas #141, Primer Piso
 Col. Hipodromo Condesa
 Mexico, DF, 06140 Mexico
 tel: 525.55.241.4800
 fax: 525.55.211.8121

Internet

www.intermec.com

Sales

800.934.3163
 (toll free in N.A.)
 tel: 425.348.2726

OEM Sales

tel: 425.348.2762

Service and Support

800.755.5505
 (toll free in N.A.)
 tel: 425.356.1799

Copyright © 2006 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611765-01C 09/06

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.



BARCODING, WIRELESS AND DATA COLLECTION

Our customers turn to us to help them become more productive and profitable. TPI's expertise guarantees your project will be successful: on time, on budget and meet your ROI requirements.

TPI will facilitate your entire wireless and data collection project:

- ✓ *Business analysis*
- ✓ *Project justification & ROI*
- ✓ *Wireless design, RF site survey and spectrum analysis*
- ✓ *WWAN, WLAN design & installation*
- ✓ *Custom software*
- ✓ *Integration w/legacy systems*
- ✓ *Mobile computers*
- ✓ *Data collection terminals*
- ✓ *Barcode printers, labels and scanners*
- ✓ *RFID solutions*
- ✓ *Configuration and deployment*
- ✓ *Training and installation*
- ✓ *Service and upgrades*
- ✓ *Remote device management and support*

TPI can share best practices in data collection from a number of industries including wholesale distribution, manufacturing, healthcare and retail/consumer goods. Our expertise allows you to shorten your learning curve and increase your return on investment.

Product specification sheet provided by TPI

www.tpi1.com
888-488-4244

