



Intermec

Product Profile

- Scans barcodes up to 11 meters (36 ft) away
- Standard range and Extra long range configurations available
- Industrial durability withstands harsh environments
- Comfortable and light weight for easy use
- Interfaces with new and legacy Intermec computers and vehicle mount terminals
- Supports multiple interface options including serial, USB, keyboard wedge, and wand emulation
- Forklift mount and dangle suspension for easy access scanning



SR60 SCANNER

Intermec's SR60 is a tethered, handheld industrial strength laser scanner designed to meet the needs of users who require extra long range scanning. This scanner is ideal for industrial applications including warehouse management, work in process, and in-transit visibility applications.

The industrial design of the SR60 ensures minimal downtime for users. The SR60 withstands multiple drops to concrete from 2 meters (6.5 ft), cold and hot temperatures, and is sealed to withstand dirt and incidental water. This enables users to utilize the SR60 for scanning applications inside and out including rigid freezer environments with a recommended heated holder.

The SR60 supports multiple interface options including RS232, keyboard wedge, USB, and wand emulation and seamlessly connects to Intermec terminals increasing mobility and productivity while keeping costs down.

The SR60 not only supports Intermec legacy handheld computers and vehicle mount terminals, but also the new CK30, CK31, CK60, 700 Series computers and CV60 vehicle mount terminal.

The Intermec SR60 features an extra long range configuration to enable users to quickly and easily scan barcodes near and far, from as close as 71 cm (27 in) to 11 meters (36 ft) away. The SR60 XLR configuration is ideal for forklift operators or warehouse personnel who need to scan items as they are loaded and unloaded or even during inventory management processing by scanning high shelf storage areas.

Multiple mounting options and accessories are available for use with the Intermec SR60 including forklift mount holster, dangle suspension, and heated holder options for freezer environments.

Intermec

Physical Description

Intermec's SR60 is an industrial strength handheld scanner. This is a tethered scanner with multiple interface options including RS232, keyboard wedge, USB, and wand emulation for quick and easy connections with Intermec terminals and standard PCs.

Warranty

3 Years

Physical Characteristics

Length: 18.3 cm (7.2 in)

Width: 11.2 cm (4.4 in)

Depth: 6.9 cm (2.7 in)

Weight: 280 gm (9.88 oz) without cable

Power

Operating voltage: 4 VDC to 14 VDC

Operating current: 95mA @ 5 VDC

Idling current: low power mode, <50µA @ 5 VDC

Intermec Terminal Connectivity

Supports tethered interface to Intermec legacy and current Intermec terminals (i.e. 242x, 2435, 2455, 2475, 246x, 248x, 5020, 5055, 6400, 700, CK30, CK31, CK60, CV30, CV60)

Scanning Performance

Scan rate: 37 scans per second

Scan range:

Standard Configuration: 7.6 to 152 cm (3 in to 60 in)

XLR Configuration: 71 to 1097 cm (27 in to 36 ft)

Pitch: ±65°

Skew: ±55°

Optical Parameter: 650nm Visible Laser Diode (VLD)

Scan Ranges**Standard Range**

Bar Code Label Size	Scan Range
5 mil	7.6 to 15.2 cm (3 in to 6 in)
7.5 mil	5.1 to 25.4 cm (2 in to 10 in)
10 mil	2.5 to 40.6 cm (1 in to 16 in)
15 mil	1.3 to 68.6 cm (0.5 in to 27 in)
20 mil	1.3 to 91.4 cm (0.5 in to 36 in)
40 mil	12.7 to 122 cm (5 in to 48 in)
55 mil	15.2 to 152 cm (6 in to 60 in)

Extra Long Range

Bar Code Label Size	Scan Range
0.38 mm / 15 mil	102 to 152 cm (39 in to 5 ft)
0.5 mm / 20 mil	71 to 183 cm (27 in to 5 ft)
1.0 mm / 40 mil	71 to 366 cm (27 in to 12 ft)
1.4 mm / 55 mil	102 to 457 cm (39 in to 15 ft)
1.0 mm / 40 mil retro-reflective	102 to 457 cm (39 in to 15 ft)
1.8 mm / 70 mil retro-reflective	203 to 762 cm (79 in to 25 ft)
2.54 mm / 100 mil retro-reflective	203 to 1097 cm (79 in to 36 ft)

Supported Bar Code Symbologies

Code 128/EAN128; Code 39; Interleaved 2/5; UPC/EAN/ISBN incl. add-ons; 2/5 Matrix, standard; Codabar; Code 93; MSI; Plessey; Pharmacode 39

Environment

Operating Temperature:

-30°C to +50°C (-22°F to +122°F)

Storage Temperature:

-40°C to +70°C (-40°F to +158°F)

Humidity: 5 to 95% RH, Non-condensing

Shock and Vibration Protection:

MIL-STD-810E

Rain and Dust Resistance: IP-54 rated

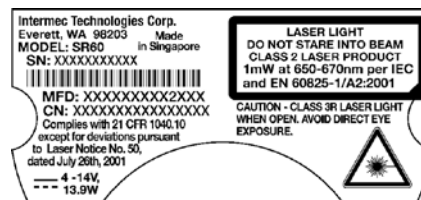
Drop Survival: Multiple drops to

concrete or steel surface from a height of 2.0 meters (6.5 feet)

Ambient light: Works in any lighting conditions from 0 to 100,000 lux

Regulatory Approvals

cULus, FCC, ICES, CE, NOM, GOST, C-Tick, CDRH Class II

**Accessories**

- Universal Mounting Kit
- Holster / Forklift Mount
- Industrial Dangle Suspension

North America

Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
tel: 425.348.2600
fax: 425.355.9551

550 2nd Street S.E.
Cedar Rapids, Iowa 52401
tel: 319.369.3100
fax: 319.369.3453

Media Supplies
9290 Le Saint Drive
Fairfield, Ohio 45014
tel: 513.874.5882
fax: 513.874.8487

Canada

7065 Tranmere Drive
Mississauga, Ontario
L5S 1M2 Canada
tel: 905.673.9333
fax: 905.673.3974

**Europe/
Middle East & Africa
Headquarters**

Reading International Business Park
Basingstoke Road
Reading RG2 6DD
United Kingdom
tel: 44.118.923.0800
fax: 44.118.923.0801

Asia

Asia Regional Office
#05-02A/03 New Tech Park
151 Lorong Chuan
Singapore 556741
tel: 65.6303.2100
fax: 65.6303.2199

Beijing Representative Office

29 FL, Unit A1, China Merchant Tower
118 Jian Guo Road
Chaoyang District, Beijing 100022
Tel: 86.10.5165.5922
Fax: 86.10.6567.6778

Australia

Level 4, 1-3 Atchison Street
St. Leonards, NSW 2065
Australia
tel: 61.2.9330.4400
fax: 61.2.9437.0204

South America & Mexico

Intermec South America Ltda.
Rua Samuel Morse 120 9 andar
Brooklin CEP04576-060
São Paulo, SP
Brazil
tel: 55.11.5502.6770

Intermec Technologies de Mexico

Av Tamaulipas #141, Primer Piso
Col. Hipodromo Condesa
Mexico, DF, 06140 Mexico
tel: 525.55.241.4800
fax: 525.55.211.8121

Internet

www.intermec.com

Sales

800.934.3163
(toll free in N.A.)
tel: 425.348.2726

OEM Sales

tel: 425.348.2762

Customer Service and Support

800.755.5505
(toll free in N.A.)
tel: 425.356.1799

Copyright © 2006 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611724-01B 12/06

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.



BARCODING, WIRELESS AND DATA COLLECTION

Our customers turn to us to help them become more productive and profitable. TPI's expertise guarantees your project will be successful: on time, on budget and meet your ROI requirements.

TPI will facilitate your entire wireless and data collection project:

- ✓ *Business analysis*
- ✓ *Project justification & ROI*
- ✓ *Wireless design, RF site survey and spectrum analysis*
- ✓ *WWAN, WLAN design & installation*
- ✓ *Custom software*
- ✓ *Integration w/legacy systems*
- ✓ *Mobile computers*
- ✓ *Data collection terminals*
- ✓ *Barcode printers, labels and scanners*
- ✓ *RFID solutions*
- ✓ *Configuration and deployment*
- ✓ *Training and installation*
- ✓ *Service and upgrades*
- ✓ *Remote device management and support*

TPI can share best practices in data collection from a number of industries including wholesale distribution, manufacturing, healthcare and retail/consumer goods. Our expertise allows you to shorten your learning curve and increase your return on investment.

Product specification sheet provided by TPI

www.tpi1.com
888-488-4244

