



Intermec

Product Profile

- Bluetooth™ radio communication eliminates cables and facilitates complete mobility
- Interfaces with Intermec terminals and personal computers
- Choice of Vista linear imager, area imager, or standard range laser scan options
- Easy configuration and personalization
- Industrial durability stands up to harsh environments



Intermec[®]
Intellibeam[™]



SR61 HANDHELD CORDLESS SCANNER

Intermec's SR61 handheld cordless scanner incorporates the flexibility and rugged design of a handheld scanner with the seamless functionality of wireless communication. The SR61 features a personal area network (PAN) radio based on Bluetooth™ communication protocol, making scanning easier and safer with no costly cables to damage or become entangled. Users gain hassle-free mobility up to 30 meters (100 feet) from the host!

With the ability to interface with Intermec computer products including the 700 Series, CK30, CK31, CK60, and CV60- the SR61 cordless scanner increases productivity while keeping costs down. Users can connect to one Intermec host device enabling multiple people to scan items for inventory management, picking, shipping and receiving, cross docking, work-in-process, tool crib, and pallet tracking, all with ease.

With multiple scan options, including linear, area and standard range laser, the SR61 allows users to configure the scanner to meet the specific needs of

their environment, whether they include reading specific barcode symbologies, decoding poor quality or damaged barcodes with ease or utilize image capture for proof of delivery and point of service applications.

The SR61 includes Intermec's EasySet™ software setup tool for easy configuration and personalization. The user can quickly set security options, select beeper tones and volumes, good read and error read responses, and many other customizations.

Scan intensive applications require reliable, accurate scanning and the SR61 delivers. The SR61 is designed to withstand rigorous application environments surviving multiple drops to concrete, cold and hot temperatures, and sealed to withstand dirt and water.

The SR61 delivers 10+ hours of use with a long lasting lithium ion battery that can be easily swapped ensuring minimal downtime.

Intermec

Physical Characteristics

Length: 17.78 cm (7 in)
Width: 6.99 cm (2.75 in)
Depth: 11.43 cm (4.5 in)
Weight: 425 gm (15 oz)

Power

Battery Type: Lithium-ion
Battery Life: 10+ hours per full charge
Recharging Time: 2.5 hours for 90% charge

Connectivity

Bluetooth radio connection to Intermec computers including the 700 Series, CK30, CK60, CV30, CV60, and standard PCs.

Radio Characteristics

Frequency Band: 2.4 Ghz
Radio Type: Bluetooth Class 1 version 1.2
Radio Data Rate: 1 megabit per second

Radio Range

Host radio Class 1: 30.5 m (100 ft)
Host radio Class 2: 10 m (32.8 ft)
Features: Adaptive Frequency Hopping

Scan Engine Options

Standard range laser
 Vista linear imager
 Area imager

Scan Range

MEMS standard range laser - Intermec EL20

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.125mm 5 mil	10 cm 3.94 in	20 cm 7.87 in
UPC/EAN	0.33 mm 13 mil	*	55 cm 21.65 in
Code 39	1.397 mm 55 mil	*	150 cm 59.06 in

Area Imager - Intermec EA11

Symbology	Density	Minimum Distance	Maximum Distance
Code 39	0.125mm 5 mils	7.5 cm 3 in	12.5 cm 4.9 in
	0.25 mm 10 mils	3.8 cm 1.5 in	26.5 cm 10.4 in
	0.5 mm 20 mils	4.5 cm 1.8 in	48 cm 18.9 in
UPC/EAN	0.33 mm 13 mils	4.5 cm 1.8 in	32.5 cm 12.8 in
Data Matrix	0.168 mm 6.6 mils	8.2 cm 3.2 in	12 cm 4.7 in
	0.254 mm 10mils	5 cm 2 in	21 cm 8.3 in
	0.381 mm 15 mils	4 cm 1.6 in	31.5 cm 12.4 in
PDF417	0.168 mm 6.6 mils	6.4 cm 2.5 in	15.8 cm 6.2 in
	0.254 mm 10 mils	4.2 cm 1.7 in	23.5 cm 9.3 in

Linear Imager - Intermec EV10

Symbology	Bar Code Content	Density	Minimum Distance	Maximum Distance
Code 39	RESO 0.100MM	0.1 mm 4 mil	10 cm 3.9 in	15 cm 5.9 in
	R 0.125 MM	0.125 mm 5 mil	9 cm 3.5 in	18.5 cm 7.3 in
	0.25	0.25 mm 10 mils	5.5 cm 2.2 in	27.5 cm 10.8 in
	.5	.05 mm 20 mil	4 cm 1.6 in	37 cm 14.6 in
	RIMM	1 mm 40 mil	7.5 cm 3 in	51 cm
UPC/EAN	12001000 10100	0.33 mm 13 mils	5.2 cm 2 in	29.5 cm 11.6 in
PDF417	10 mil	0.254 mm 10 mils	10 cm 3.9 in	17.5 cm 6.9 in
	15 mil	0.381 mm 15 mils	8 cm 3.1 in	19.5 cm 7.7 in

Supported Bar Code Symbologies

1D (all versions): Code 128/EAN128; Code 39; Interleaved 2/5: UPC/EAN/ISBN including add-ons; 2/5 Matrix, standard; Codabar; Code 93; MSI; Plessey; Code 93i; Code 11; Telepen; ISBT128; RSS

Stacked (Vista and Area versions only): RSS; Micro PDF; PDF417; Macro PDF; Codablock; TLC39; Composite Codes (CC-A, B & C)

2D (Area version only): Maxicode; DataMatrix; QR Code; 4-State Postal Code; Planet Postal Code; Postnet Postal Code

Environment


Operating Temperature:
 -20°C to +50°C (-4°F to +122°F)
Storage Temperature:
 -20°C to +60°C (-4°F to +140°F)
Recharging Temperature:
 0°C to +35°C (32°F to +95°F)
Humidity: 0 to 95% RH, Non-condensing
Shock and Vibration Protection: SAE Specification J1399 Class 3 (off road vehicle)
Rain and Dust Resistance: IP54
Drop Survival: 26 drops onto concrete or steel surface from a height of 1.98 meters (6.5 feet)
Ambient light: Works in any lighting conditions from 0 to 100,000 lux

Accessories

SR61 Dangle Suspension (wrist or fixed)
 Belt Holster
 Desktop / Wall Mount Charger
 2, 4 and 8 Bay Charger
 Bluetooth USB Adapter
 Replacement Battery w/ Boot
 EasySet™ Configuration Utility
 Bluetooth RS232 adapter
 Keypoint Lite Software Wedge (for use with PCs using Win 95, 98, 2000, XP SP1 and English QWERTY keyboards)
 Keypoint Bluetooth Software Wedge (for use with PCs using Win XP SP2 and international keyboard types)

Regulatory Approvals

CISPR 22 Class B; Part 15 of FCC rules, Class B; CE Mark (EU) (EN 55024, EN 55022 Class B, IEC 60950-1, IEC 60825-1); cULus (Canada and the USA) (UL 60950-1); GS Mark (Germany) (EN 60950-1, EN 60825-1); NOM (Mexico); C-TICK (Australia and New Zealand) (AS/NZS 3548 based on CISPR22); CQC and SRRS (China); Spring Mark (Singapore); MIC (South Korea); ANATEL (Brazil)

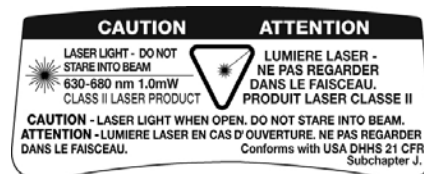

North America
 Corporate Headquarters
 6001 36th Avenue West
 Everett, Washington 98203
 tel: 425.348.2600
 fax: 425.355.9551

550 2nd Street S.E.
 Cedar Rapids, Iowa 52401
 tel: 319.369.3100
 fax: 319.369.3453

Media Supplies
 9290 Le Saint Drive
 Fairfield, Ohio 45014
 tel: 513.874.5882
 fax: 513.874.8487

Canada
 7065 Tranmere Drive
 Mississauga, Ontario
 L5S 1M2 Canada
 tel: 905.673.9333
 fax: 905.673.3974

**Europe/
 Middle East & Africa
 Headquarters**
 Reading International Business Park
 Basingstoke Road
 Reading RG2 6DD
 United Kingdom
 tel: 44.118.923.0800
 fax: 44.118.923.0801

Asia
Asia Regional Office
 26-16 International Plaza
 10 Anson Road
 Singapore 079903
 tel: 65.6324.8391
 fax: 65.6324.8393

Beijing Representative Office
 29 FL, Unit A1, China Merchant Tower
 118 Jian Guo Road
 Chaoyang District, Beijing 100022
 Tel: 86.10.5165.5922
 Fax: 86.10.6567.6778

Australia
 Level 4, 1-3 Atchison Street
 St. Leonards, NSW 2065
 Australia
 tel: 61.2.9330.4400
 fax: 61.2.9437.0204

South America & Mexico
Intermec South America Ltda.
 Rua Samuel Morse 120 9 andar
 Brooklin CEP04576-060
 São Paulo, SP
 Brazil
 tel: 55.11.5502.6770

Intermec Technologies de Mexico
 Av Tamaulipas #141, Primer Piso
 Col. Hipodromo Condesa
 Mexico, DF, 06140 Mexico
 tel: 525.55.241.4800
 fax: 525.55.211.8121

Internet
 www.intermec.com

Sales
 800.934.3163
 (toll free in N.A.)
 tel: 425.348.2726

OEM Sales
 tel: 425.348.2762

Customer Service and Support
 800.755.5505
 (toll free in N.A.)
 tel: 425.356.1799

Copyright © 2006 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611734-01E 09/06

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.

Intermec®



BARCODING, WIRELESS AND DATA COLLECTION

Our customers turn to us to help them become more productive and profitable. TPI's expertise guarantees your project will be successful: on time, on budget and meet your ROI requirements.

TPI will facilitate your entire wireless and data collection project:

- ✓ *Business analysis*
- ✓ *Project justification & ROI*
- ✓ *Wireless design, RF site survey and spectrum analysis*
- ✓ *WWAN, WLAN design & installation*
- ✓ *Custom software*
- ✓ *Integration w/legacy systems*
- ✓ *Mobile computers*
- ✓ *Data collection terminals*
- ✓ *Barcode printers, labels and scanners*
- ✓ *RFID solutions*
- ✓ *Configuration and deployment*
- ✓ *Training and installation*
- ✓ *Service and upgrades*
- ✓ *Remote device management and support*

TPI can share best practices in data collection from a number of industries including wholesale distribution, manufacturing, healthcare and retail/consumer goods. Our expertise allows you to shorten your learning curve and increase your return on investment.

Product specification sheet provided by TPI

www.tpi1.com
888-488-4244

